

SEALMET 2x36W T8 Dust & Moisture proof steel fluorescent luminaire


About Product



Technical Information

SEALMET 2x36W T8 Dust & Moisture proof steel fluorescent luminaire

Photometric Graph

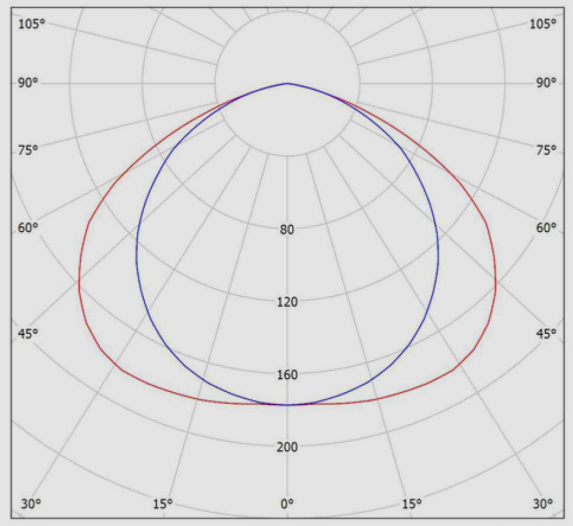

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	30	70	70	50	50	30
p Walls		50	30	50	30	30	20	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	16.3	17.6	16.6	17.9	18.1	15.6	17.0	15.9	17.2	17.4	
	3H	17.2	18.4	17.5	18.6	18.9	16.9	18.2	17.3	18.4	18.7	
	4H	17.3	18.4	17.6	18.7	19.0	17.3	18.4	17.6	18.7	19.0	
	6H	17.3	18.3	17.6	18.6	18.9	17.4	18.5	17.8	18.8	19.1	
	8H	17.2	18.2	17.6	18.5	18.9	17.4	18.4	17.8	18.7	19.0	
	12H	17.2	18.1	17.6	18.5	18.8	17.4	18.3	17.7	18.6	19.0	
4H	2H	16.7	17.9	17.1	18.2	18.4	16.2	17.3	16.5	17.6	17.9	
	3H	17.7	18.7	18.1	19.0	19.3	17.7	18.6	18.1	19.0	19.3	
	4H	17.9	18.7	18.3	19.1	19.4	18.1	19.0	18.5	19.3	19.7	
	6H	17.9	18.6	18.3	19.0	19.4	18.3	19.0	18.7	19.4	19.8	
	8H	17.9	18.5	18.3	18.9	19.3	18.3	19.0	18.7	19.4	19.8	
	12H	17.8	18.4	18.3	18.9	19.3	18.3	18.9	18.7	19.3	19.7	
8H	4H	18.0	18.7	18.4	19.0	19.5	18.2	18.9	18.6	19.2	19.7	
	6H	18.0	18.5	18.5	19.0	19.4	18.4	18.9	18.8	19.4	19.8	
	8H	18.0	18.4	18.5	18.9	19.4	18.4	18.9	18.9	19.3	19.8	
	12H	17.9	18.3	18.4	18.8	19.3	18.4	18.8	18.9	19.2	19.7	
	4H	18.0	18.6	18.4	19.0	19.4	18.2	18.8	18.6	19.2	19.6	
	6H	18.0	18.5	18.5	18.9	19.4	18.4	18.8	18.8	19.3	19.8	
12H	8H	18.0	18.4	18.4	18.8	19.3	18.4	18.8	18.9	19.2	19.7	
	12H	18.0	18.4	18.4	18.8	19.3	18.4	18.8	18.9	19.2	19.7	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.2					+0.2 / -0.2					
S = 1.5H		+0.5 / -0.5					+0.5 / -0.7					
S = 2.0H		+1.2 / -1.9					+0.8 / -1.5					
Standard table		BK02					BK03					
Correction		-7.3					-6.8					
Summand												
Corrected Glare Indices referring to 5000lm Total Luminous Flux												

Dimensional Drawing

