


ELEGANT 4x24W T5 recessed fluorescent luminaire, Specular pre-anodized aluminium double optic parabolic louver (MIRO®) with electronic ballast


About Product

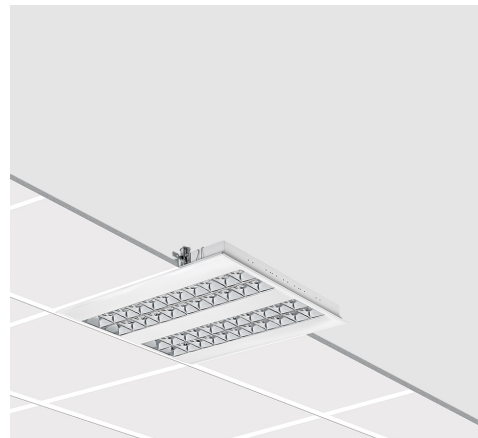

Technical Information

ELEGANT 4x24W T5 recessed fluorescent luminaire, Specular pre-anodized aluminium double optic parabolic louver (MIRO®) with electronic ballast

Photometric Graph

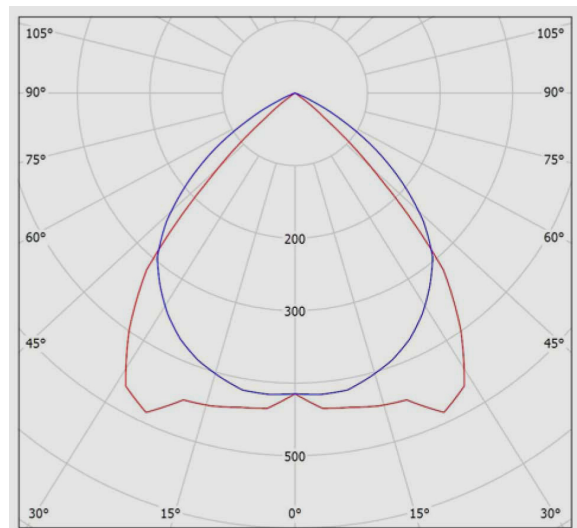

Glare Evaluation According to UGR											
		70	70	50	50	30	70	70	50	50	30
p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	5.5	6.5	5.8	6.7	6.9	20.7	21.6	20.9	21.9	22.1
	3H	5.4	6.2	5.7	6.5	6.7	20.5	21.4	20.9	21.7	21.9
	4H	5.3	6.1	5.6	6.4	6.6	20.5	21.3	20.8	21.6	21.8
	6H	5.2	6.0	5.6	6.3	6.5	20.4	21.2	20.7	21.4	21.7
	8H	5.2	5.9	5.5	6.2	6.5	20.4	21.1	20.7	21.4	21.7
4H	12H	5.1	5.8	5.5	6.1	6.5	20.3	21.0	20.7	21.3	21.6
	2H	5.9	6.8	6.3	7.0	7.3	20.4	21.3	20.8	21.5	21.8
	3H	5.8	6.5	6.2	6.8	7.1	20.3	21.0	20.7	21.3	21.6
	4H	5.8	6.3	6.1	6.7	7.0	20.3	20.9	20.7	21.2	21.5
	6H	5.7	6.2	6.1	6.6	6.9	20.2	20.7	20.6	21.1	21.5
8H	8H	5.6	6.1	6.1	6.5	6.9	20.2	20.6	20.6	21.0	21.5
	12H	5.6	6.0	6.0	6.4	6.8	20.1	20.5	20.6	20.9	21.4
	4H	5.7	6.1	6.1	6.5	6.9	20.2	20.6	20.6	21.0	21.4
	6H	5.6	5.9	6.0	6.4	6.8	20.1	20.4	20.5	20.9	21.3
	8H	5.5	5.9	6.0	6.3	6.8	20.0	20.4	20.5	20.8	21.3
12H	12H	5.5	5.8	6.0	6.2	6.7	20.0	20.3	20.5	20.7	21.2
	4H	5.6	6.0	6.1	6.4	6.9	20.1	20.5	20.6	20.9	21.4
	6H	5.5	5.9	6.0	6.3	6.8	20.0	20.4	20.5	20.8	21.4
	8H	5.5	5.8	6.0	6.2	6.7	20.0	20.3	20.5	20.7	21.2
	Variation of the observer position for the luminaire distances S										
S = 1.0H		+2.3 / -9.7					+1.1 / -1.6				
S = 1.5H		+3.7 / -19.1					+2.1 / -5.2				
S = 2.0H		+5.4 / -26.5					+3.9 / -14.0				
Standard table		BK00					BK00				
Correction		-6.6					-3.6				
Summand											
Corrected Glare Indices referring to 7000lm Total Luminous Flux											

Dimensional Drawing

