

ELEGANT 2x18W TC-L recessed fluorescent luminaire, Specular pre-anodized aluminium double optic parabolic louver (MIRO®)


About Product



Technical Information

ELEGANT 2x18W TC-L recessed fluorescent luminaire, Specular pre-anodized aluminium double optic parabolic louver (MIRO®)

Photometric Graph

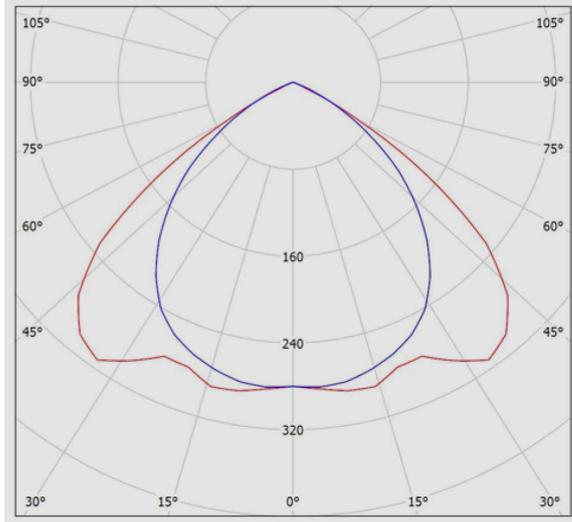

Glare Evaluation According to UGR											
p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room Size		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
X	Y										
2H	2H	20.3	21.4	20.6	21.6	21.9	19.1	20.2	19.4	20.5	20.7
	3H	20.1	21.2	20.4	21.4	21.7	19.0	20.1	19.4	20.3	20.6
	4H	20.1	21.0	20.4	21.3	21.6	19.0	19.9	19.3	20.2	20.5
	6H	20.0	20.9	20.3	21.2	21.5	18.9	19.8	19.3	20.1	20.4
	8H	19.9	20.8	20.3	21.1	21.4	18.9	19.7	19.2	20.0	20.3
4H	12H	19.9	20.7	20.3	21.0	21.3	18.8	19.6	19.2	19.9	20.3
	2H	20.2	21.1	20.5	21.4	21.7	19.1	20.0	19.4	20.3	20.6
	3H	20.1	20.9	20.4	21.2	21.5	19.0	19.8	19.4	20.2	20.5
	4H	20.0	20.7	20.4	21.0	21.4	19.0	19.7	19.4	20.0	20.4
	6H	19.9	20.5	20.4	20.9	21.3	18.9	19.5	19.3	19.9	20.3
8H	8H	19.9	20.4	20.3	20.8	21.2	18.9	19.4	19.3	19.8	20.2
	12H	19.9	20.4	20.3	20.8	21.2	18.9	19.3	19.3	19.7	20.2
	4H	19.9	20.4	20.3	20.8	21.2	18.9	19.4	19.3	19.8	20.2
	6H	19.8	20.3	20.3	20.7	21.1	18.8	19.3	19.3	19.7	20.1
	8H	19.8	20.2	20.3	20.6	21.1	18.8	19.2	19.2	19.6	20.1
12H	12H	19.7	20.1	20.2	20.5	21.0	18.7	19.1	19.2	19.5	20.0
	4H	19.9	20.4	20.3	20.8	21.2	18.9	19.3	19.3	19.7	20.2
	6H	19.8	20.2	20.3	20.6	21.1	18.8	19.2	19.2	19.6	20.1
	8H	19.7	20.1	20.2	20.5	21.0	18.7	19.1	19.2	19.5	20.0
	8H	19.7	20.1	20.2	20.5	21.0	18.7	19.1	19.2	19.5	20.0

Variation of the observer position for the luminaire distances S		
S = 1.0H	+0.8 / -0.9	+0.7 / -1.4
S = 1.5H	+2.1 / -6.6	+2.0 / -6.8
S = 2.0H	+3.9 / -15.5	+2.6 / -9.7
Standard table	BK00	BK01
Correction	-0.4	
Summand		-1.1

Corrected Glare Indices referring to 2400lm Total Luminous Flux

Dimensional Drawing

