


**ELEGANT 2x18 W TC-L Recessed fluorescent luminaire, Specular pre-anodized aluminium double optic parabolic louver (MIRO®) with Electronic ballast**

**About Product**

---

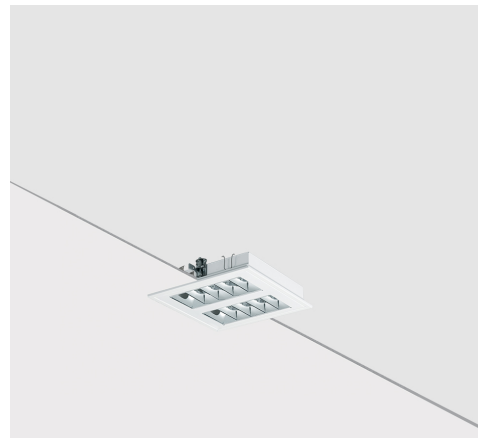


**Technical Information**

---

## ELEGANT 2x18 W TC-L Recessed fluorescent luminaire, Specular pre-anodized aluminium double optic parabolic louver (MIRO®) with Electronic ballast

### Photometric Graph

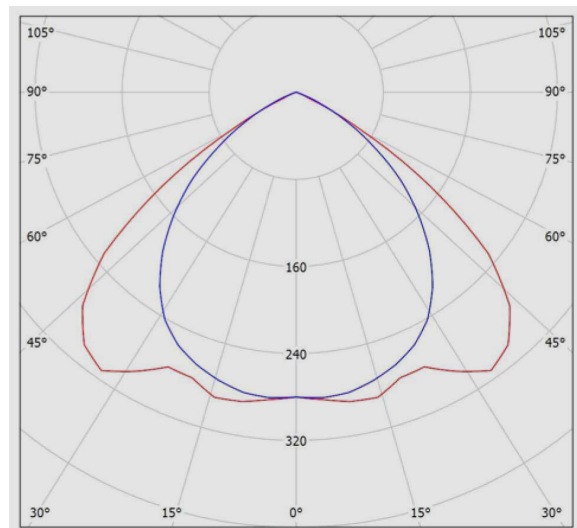

Glare Evaluation According to UGR												
p Ceiling	70	70	50	50	30	70	70	50	50	30		
p Walls	50	30	50	30	30	50	30	50	30	30		
p Floor	20	20	20	20	20	20	20	20	20	20		
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	20.3	21.4	20.6	21.6	21.9	19.1	20.2	19.4	20.5	20.7	
	3H	20.1	21.2	20.4	21.4	21.7	19.0	20.1	19.4	20.3	20.6	
	4H	20.1	21.0	20.4	21.3	21.6	19.0	19.9	19.3	20.2	20.5	
	6H	20.0	20.9	20.3	21.2	21.5	18.9	19.8	19.3	20.1	20.4	
	8H	19.9	20.8	20.3	21.1	21.4	18.9	19.7	19.2	20.0	20.3	
4H	12H	19.9	20.7	20.3	21.0	21.3	18.8	19.6	19.2	19.9	20.3	
	2H	20.2	21.1	20.5	21.4	21.7	19.1	20.0	19.4	20.3	20.6	
	3H	20.1	20.9	20.4	21.2	21.5	19.0	19.8	19.4	20.2	20.5	
	4H	20.0	20.7	20.4	21.0	21.4	19.0	19.7	19.4	20.0	20.4	
	6H	19.9	20.5	20.4	20.9	21.3	18.9	19.5	19.3	19.9	20.3	
8H	8H	19.9	20.4	20.3	20.8	21.2	18.9	19.4	19.3	19.8	20.2	
	12H	19.9	20.4	20.3	20.8	21.2	18.9	19.3	19.3	19.7	20.2	
	4H	19.9	20.4	20.3	20.8	21.2	18.9	19.4	19.3	19.8	20.2	
	6H	19.8	20.3	20.3	20.7	21.1	18.8	19.3	19.3	19.7	20.1	
	8H	19.8	20.2	20.3	20.6	21.1	18.8	19.2	19.2	19.6	20.1	
12H	12H	19.7	20.1	20.2	20.5	21.0	18.7	19.1	19.2	19.5	20.0	
	4H	19.9	20.4	20.3	20.8	21.2	18.9	19.3	19.3	19.7	20.2	
	6H	19.8	20.2	20.3	20.6	21.1	18.8	19.2	19.2	19.6	20.1	
	8H	19.7	20.1	20.2	20.5	21.0	18.7	19.1	19.2	19.5	20.0	
	12H	19.7	20.1	20.2	20.5	21.0	18.7	19.1	19.2	19.5	20.0	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.8 / -0.9					+0.7 / -1.4					
S = 1.5H		+2.1 / -6.6					+2.0 / -4.8					
S = 2.0H		+3.9 / -15.5					+2.6 / -9.7					
Standard table		BK00					BK01					
Correction		-0.4										
Summand							-1.1					
Corrected Glare Indices referring to 2400lm Total Luminous Flux												

### Dimensional Drawing

