

3151100004

ROCKY oval-shaped bulkhead, Metal guard, 4000K, LED1, 950 Lumens, 10W, A1 series



About Product




Technical Information

3151100004

ROCKY oval-shaped bulkhead, Metal guard, 4000K, LED1, 950 Lumens, 10W, A1 series

Photometric Graph

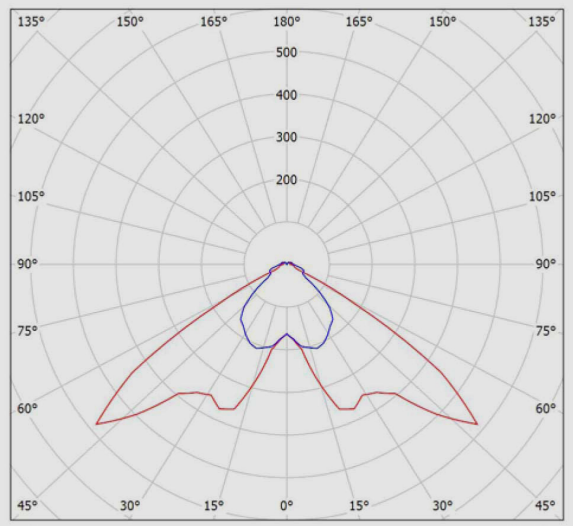

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	22.9	24.1	23.3	24.4	24.8	14.0	15.2	14.4	15.6	15.9	
	3H	22.8	23.9	23.2	24.2	24.6	15.7	16.8	16.1	17.1	17.5	
	4H	22.7	23.7	23.1	24.1	24.5	16.4	17.4	16.8	17.8	18.2	
	6H	22.7	23.6	23.1	24.0	24.4	16.9	17.9	17.4	18.2	18.7	
	8H	22.7	23.6	23.1	24.0	24.4	17.1	18.0	17.6	18.4	18.8	
4H	12H	22.7	23.5	23.1	24.0	24.4	17.3	18.1	17.7	18.6	19.0	
	2H	22.7	23.7	23.1	24.0	24.4	14.2	15.2	14.6	15.6	16.0	
	3H	22.6	23.4	23.0	23.9	24.3	16.1	16.9	16.6	17.4	17.8	
	4H	22.6	23.3	23.1	23.8	24.3	17.0	17.7	17.5	18.2	18.6	
	6H	22.6	23.3	23.1	23.7	24.2	17.6	18.3	18.1	18.8	19.3	
8H	8H	22.6	23.2	23.1	23.7	24.2	17.9	18.5	18.4	19.0	19.5	
	12H	22.7	23.2	23.2	23.7	24.2	18.2	18.7	18.7	19.2	19.8	
	4H	22.5	23.1	23.0	23.6	24.1	17.1	17.7	17.7	18.2	18.7	
	6H	22.6	23.1	23.1	23.6	24.2	17.9	18.4	18.5	18.9	19.5	
	8H	22.6	23.1	23.2	23.6	24.2	18.3	18.7	18.8	19.2	19.8	
12H	12H	22.7	23.1	23.3	23.6	24.2	18.6	19.0	19.2	19.6	20.2	
	4H	22.5	23.0	23.0	23.5	24.1	17.1	17.7	17.7	18.2	18.7	
	6H	22.6	23.0	23.1	23.5	24.1	18.0	18.4	18.5	18.9	19.5	
	8H	22.6	23.0	23.2	23.6	24.2	18.3	18.7	18.9	19.3	19.9	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+1.3 / -1.3					+0.7 / -1.1					
S = 1.5H		+3.7 / -5.5					+1.6 / -1.8					
S = 2.0H		+5.7 / -7.5					+2.1 / -2.0					
Standard table		BK00					BK04					
Correction		6.4					2.6					
Summand												
Corrected Glare Indices referring to 900lm Total Luminous Flux												

Dimensional Drawing

