

## **TULIP LED Park light, Clear polycarbonate diffuser, 6500K, LED3, 3200 Lumens, 26W, B2 series, White**

### **About Product**

---

TULIP LED park light is Mazinoor state of the art design suitable for outdoor and park light applications. High pressure die-cast aluminum body, high efficacy, energy saving, environment friendliness, and high ingress protection (IP65) are among the highlights of this luminaire.




### **Technical Information**

---

## TULIP LED Park light, Clear polycarbonate diffuser, 6500K, LED3, 3200 Lumens, 26W, B2 series, White

### Photometric Graph

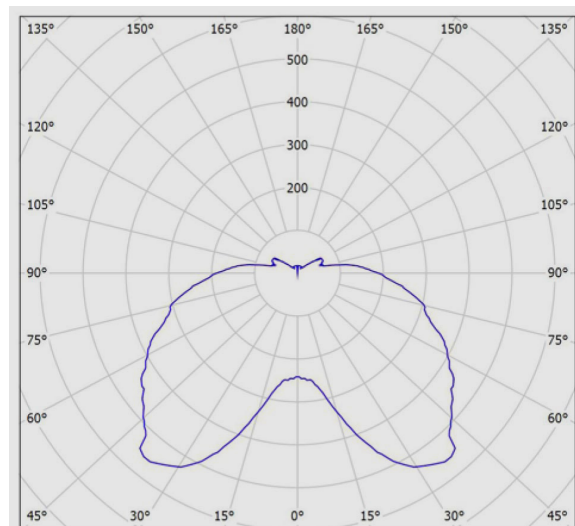

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	20.6	22.0	21.1	22.5	23.0	23.5	24.9	24.0	25.4	25.9	
	3H	22.1	23.4	22.7	23.9	24.5	25.4	26.7	26.0	27.2	27.8	
	4H	22.9	24.0	23.4	24.6	25.2	26.4	27.6	27.0	28.1	28.7	
	6H	23.5	24.6	24.1	25.2	25.8	27.4	28.5	27.9	29.0	29.6	
	8H	23.8	24.9	24.4	25.5	26.1	27.8	28.9	28.4	29.4	30.1	
4H	12H	24.1	25.1	24.7	25.7	26.3	28.2	29.2	28.8	29.8	30.5	
	2H	21.4	22.6	21.9	23.1	23.7	23.7	24.9	24.3	25.4	26.0	
	3H	23.1	24.1	23.6	24.6	25.3	25.8	26.8	26.3	27.3	28.0	
	4H	23.9	24.8	24.5	25.4	26.1	26.9	27.8	27.5	28.4	29.0	
	6H	24.8	25.6	25.4	26.2	26.9	28.0	28.8	28.6	29.4	30.1	
8H	8H	25.1	25.9	25.8	26.5	27.2	28.5	29.3	29.1	29.9	30.6	
	12H	25.5	26.2	26.1	26.8	27.5	29.0	29.7	29.7	30.4	31.1	
	4H	24.4	25.1	25.0	25.8	26.5	27.0	27.7	27.6	28.4	29.1	
	6H	25.4	26.0	26.1	26.7	27.5	28.2	28.9	28.9	29.5	30.3	
	8H	25.9	26.5	26.6	27.1	27.9	28.9	29.4	29.5	30.1	30.9	
12H	12H	26.3	26.8	27.0	27.5	28.3	29.5	30.0	30.2	30.7	31.5	
	4H	24.5	25.2	25.1	25.8	26.5	27.0	27.7	27.6	28.3	29.1	
	6H	25.6	26.1	26.2	26.8	27.6	28.3	28.8	28.9	29.5	30.3	
	8H	26.1	26.6	26.8	27.3	28.1	28.9	29.4	29.6	30.1	30.9	
	Variation of the observer position for the luminance distances S											
S = 1.0H		+0.1 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.2 / -0.3					+0.5 / -0.4					
S = 2.0H		+0.3 / -0.6					+0.9 / -0.8					
Standard table		BK07					---					
Correction		9.4					---					
Summand												
Corrected Glare Indices referring to 2800lm Total Luminous Flux												

### Dimensional Drawing

