

TULIP LED Park light, Clear polycarbonate diffuser, 6500K, LED3, 3200 Lumens, 26W, B2 series, White


About Product



Technical Information

TULIP LED Park light, Clear polycarbonate diffuser, 6500K, LED3, 3200 Lumens, 26W, B2 series, White

Photometric Graph

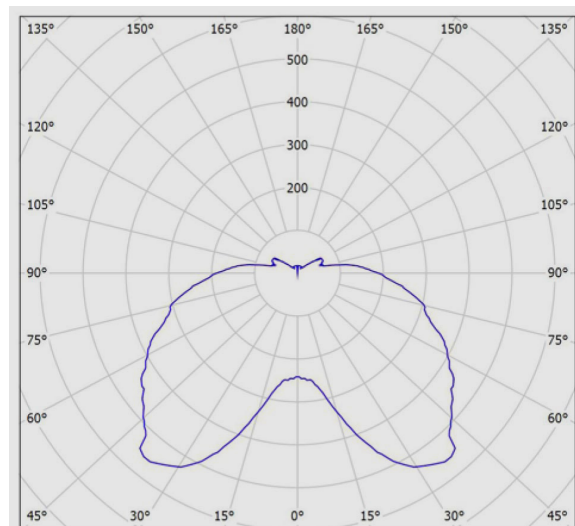

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	20.6	22.0	21.1	22.5	23.0	23.5	24.9	24.0	25.4	25.9	
	3H	22.1	23.4	22.7	23.9	24.5	25.4	26.7	26.0	27.2	27.8	
	4H	22.9	24.0	23.4	24.6	25.2	26.4	27.6	27.0	28.1	28.7	
	6H	23.5	24.6	24.1	25.2	25.8	27.4	28.5	27.9	29.0	29.6	
	8H	23.8	24.9	24.4	25.5	26.1	27.8	28.9	28.4	29.4	30.1	
4H	12H	24.1	25.1	24.7	25.7	26.3	28.2	29.2	28.8	29.8	30.5	
	2H	21.4	22.6	21.9	23.1	23.7	23.7	24.9	24.3	25.4	26.0	
	3H	23.1	24.1	23.6	24.6	25.3	25.8	26.8	26.3	27.3	28.0	
	4H	23.9	24.8	24.5	25.4	26.1	26.9	27.8	27.5	28.4	29.0	
	6H	24.8	25.6	25.4	26.2	26.9	28.0	28.8	28.6	29.4	30.1	
8H	8H	25.1	25.9	25.8	26.5	27.2	28.5	29.3	29.1	29.9	30.6	
	12H	25.5	26.2	26.1	26.8	27.5	29.0	29.7	29.7	30.4	31.1	
	4H	24.4	25.1	25.0	25.8	26.5	27.0	27.7	27.6	28.4	29.1	
	6H	25.4	26.0	26.1	26.7	27.5	28.2	28.9	28.9	29.5	30.3	
	8H	25.9	26.5	26.6	27.1	27.9	28.9	29.4	29.5	30.1	30.9	
12H	12H	26.3	26.8	27.0	27.5	28.3	29.5	30.0	30.2	30.7	31.5	
	4H	24.5	25.2	25.1	25.8	26.5	27.0	27.7	27.6	28.3	29.1	
	6H	25.6	26.1	26.2	26.8	27.6	28.3	28.8	28.9	29.5	30.3	
	8H	26.1	26.6	26.8	27.3	28.1	28.9	29.4	29.6	30.1	30.9	
	Variation of the observer position for the luminance distances S											
S = 1.0H	+0.1 / -0.1					+0.2 / -0.2						
S = 1.5H	+0.2 / -0.3					+0.5 / -0.4						
S = 2.0H	+0.3 / -0.6					+0.9 / -0.8						
Standard table	BK07					---						
Correction	9.4					---						
Summand												
Corrected Glare Indices referring to 2800lm Total Luminous Flux												

Dimensional Drawing

