

M610B2CPLED3830-BL

TULIP park light, B2 series, Optional downward LED to light the pole, 3000K, LED3, 2600 Lumens, 26W, Black



About Product

TULIP LED park light is Mazinoor state of the art design suitable for outdoor and park light applications. High pressure die-cast aluminum body, high efficacy, energy saving, environment friendliness, and high ingress protection (IP65) are among the highlights of this luminaire.



Technical Information

Catalogue Code/product code:	M610B2CPLED3830-BL
Mounting Type:	Vertical mounting on pole using two way bracket. Pillar bracket. Vertical pole mounting. Wall mounting with bracket
Application:	Green area
Light source type:	LED
Module/ Lamp quantity:	1
CCT (Color temperature):	3000K - Warm White
Light source:	LED
Lumen maintenance:	> 100.000 hours
Lumen maintenance factor:	L85
CRI (Color rendering index):	> 80
Power Consumption:	26
Luminous Flux:	2600
Efficacy (lm/W):	100
IP (Ingress Protection):	IP65
Insulation Class:	Class I
Max. Ambient Temperature:	+50°C
Min. Ambient Temperature:	-20°C
Ballast/ Driver:	Constant Current Driver (PF> 0.9)
FLICKER:	Flicker Free

M610B2CPLED3830-BL


TULIP park light, B2 series, Optional downward LED to light the pole, 3000K, LED3, 2600 Lumens, 26W, Black

Ballast/ driver Spec:	Non-dimmable
Ballast/ Driver (Channel quantity):	Single channel
Mains voltage:	220~240 VAC±10%
Voltage Frequency:	50/60 Hz
Wire / Cable Spec:	PVC solid wire
Wire cross section:	0.5
Terminal material:	Polycarbonate
Terminal Spec:	Cable looping is possible, 3-Pole (Size: 2.5), Tool free wire connection
Body Material:	Die-Cast aluminum
Body Coating:	Powder coated
Body Color:	Black
RAL:	RAL9005
Reflector Material:	aluminum sheet
Reflector Coating:	Black powder coated
Diffuser/Glass Material:	Polycarbonate diffuser
Diffuser/Glass Shape:	Clear
Light Distribution:	Park lighting
Gasket Material:	silicon
Interior Connection Material:	Galvanized coated
Exterior Connection Material:	Dacromet coated
Packaging type:	Nylon cover and carton
Weight(Kg):	3.9
Dimensions(mm):	Ø450x455
Luminaire mechanical impact resistance: IK07	

M610B2CPLED3830-BL

TULIP park light, B2 series, Optional downward LED to light the pole, 3000K, LED3, 2600 Lumens, 26W, Black

Photometric Graph

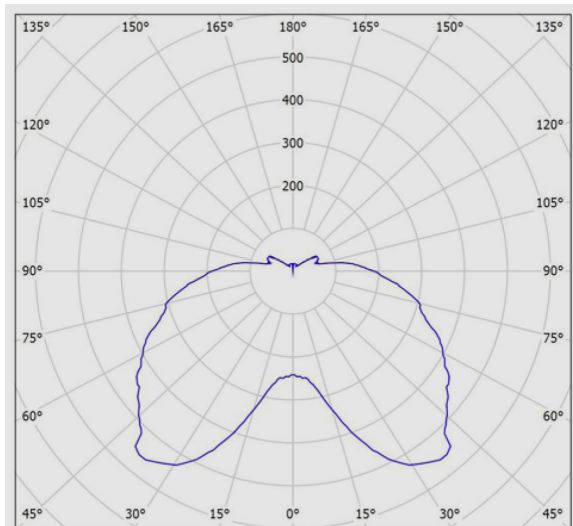

Dimensional Drawing

