


TULIP LED (DOB) Park light, Clear polycarbonate diffuser, 6500K, LED3, 3000 Lumens, 32W, CA1 series, Black


About Product

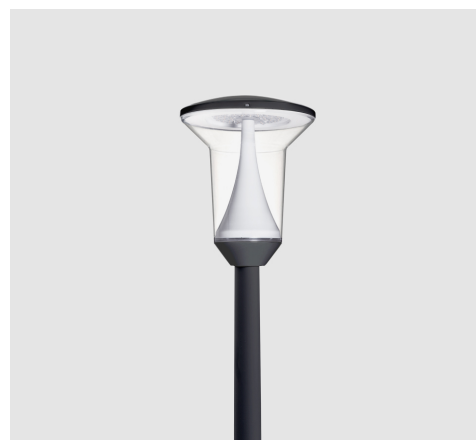

Technical Information

TULIP LED (DOB) Park light, Clear polycarbonate diffuser, 6500K, LED3, 3000 Lumens, 32W, CA1 series, Black

Photometric Graph

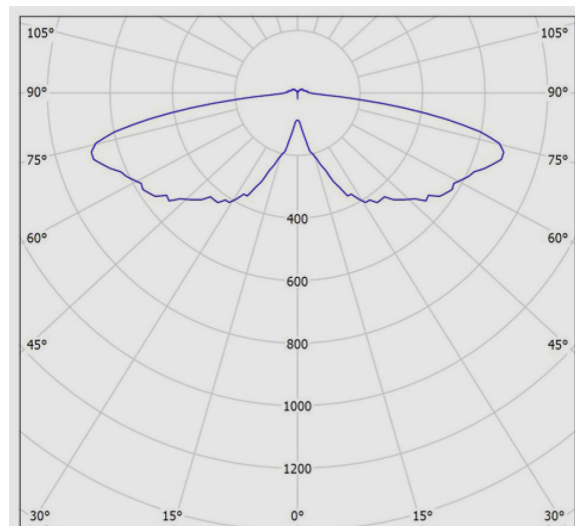

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	30
p Walls		50	30	50	30	30	50	30	50	30	30	30
p Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	22.3	24.0	22.7	24.3	24.7	25.3	27.0	25.6	27.3	27.7	27.7
	3H	25.1	26.6	25.5	27.0	27.4	28.6	30.1	29.0	30.5	30.9	30.9
	4H	26.5	28.0	26.9	28.4	28.8	30.3	31.8	30.7	32.2	32.6	32.6
	6H	27.5	28.9	27.9	29.3	29.7	31.5	32.9	32.0	33.3	33.8	33.8
	8H	27.7	29.0	28.1	29.4	29.9	31.8	33.2	32.3	33.6	34.0	34.0
4H	12H	27.7	29.0	28.1	29.4	29.9	31.9	33.2	32.3	33.6	34.0	34.0
	2H	23.5	25.0	23.9	25.4	25.8	25.7	27.2	26.1	27.6	28.0	28.0
	3H	26.4	27.7	26.9	28.2	28.6	29.2	30.5	29.6	30.9	31.4	31.4
	4H	27.9	29.1	28.4	29.6	30.1	31.0	32.2	31.5	32.6	33.1	33.1
	6H	29.0	30.0	29.5	30.5	31.0	32.3	33.4	32.8	33.9	34.4	34.4
8H	12H	29.2	30.2	29.7	30.7	31.2	32.6	33.6	33.2	34.1	34.6	34.6
	2H	29.3	30.2	29.8	30.7	31.2	32.7	33.6	33.3	34.1	34.7	34.7
	4H	28.7	29.6	29.2	30.1	30.6	31.3	32.2	31.8	32.7	33.3	33.3
	6H	29.8	30.6	30.3	31.1	31.7	32.7	33.5	33.2	34.0	34.6	34.6
	8H	30.1	30.8	30.6	31.3	31.9	33.0	33.8	33.6	34.3	34.9	34.9
12H	12H	30.2	30.8	30.7	31.3	31.9	33.2	33.8	33.7	34.3	34.9	34.9
	4H	28.8	29.7	29.3	30.2	30.7	31.3	32.2	31.8	32.7	33.2	33.2
	6H	29.9	30.6	30.5	31.2	31.8	32.7	33.4	33.3	34.0	34.5	34.5
	8H	30.2	30.8	30.8	31.4	32.0	33.1	33.7	33.6	34.3	34.8	34.8
	12H	30.2	30.8	30.8	31.4	32.0	33.1	33.7	33.6	34.3	34.8	34.8
Variation of the observer position for the luminance distances S												
S = 1.0H		+0.0 / -0.0					+0.1 / -0.1					
S = 1.5H		+0.2 / -0.2					+0.4 / -0.3					
S = 2.0H		+0.2 / -0.3					+0.7 / -0.5					
Standard table		BK09					---					
Correction Summand		13.6					---					
Corrected Glare Indices referring to 3000lm Total Luminous Flux												

Dimensional Drawing

