

M313ULED7740-S

SATURN street light, 4000K, LED7, 22000 Lumens, 150W, Gray



About Product

SATURN floodlight, street and tunnel luminaire is Mazinoor state of the art design suitable for floodlighting and tunnel and street light application. High pressure die-cast aluminum body and high ingress protection (IP66) are among the highlights of this luminaire.



Technical Information

Catalogue Code/product code:	M313ULED7740-S
Mounting Type:	Vertical mounting on pole using two way bracket. Horizontal boom mounting, Vertical pole mounting, Wall Mounted; Surface Mounted
Application:	Street and Urban lighting
Light source type:	LED
Module/ Lamp quantity:	3
CCT (Color temperature):	4000K - Neutral White
Light source:	LED
Lumen maintenance:	> 100.000 hours
Lumen maintenance factor:	L80
CRI (Color rendering index):	> 70
Power Consumption:	150
Luminous Flux:	22000
Efficacy (lm/W):	147
IP (Ingress Protection):	IP66
Insulation Class:	Class I
Max. Ambient Temperature:	+55°C
Min. Ambient Temperature:	-30°C
Ballast/ Driver:	Constant Current Driver (PF> 0.9)
Ballast/ driver Spec:	Dimmable (1-10V)

M313ULED7740-S


SATURN street light, 4000K, LED7, 22000 Lumens, 150W, Gray

Ballast/ Driver (Channel quantity):	Single channel
Mains voltage:	100~277 VAC±10%
Voltage Frequency:	50/60 Hz
Wire / Cable Spec:	PVC solid wire
Wire cross section:	0.5
Terminal material:	Polycarbonate
Socket & Plug:	Polyamide
Socket & Plug Spec:	3-Pole (Size: 2.5)
Cable Gland Spec:	Polyamide
Cable gland type:	PG13.5
Body Material:	Die-Cast aluminum
Body Coating:	Powder coated
Body Color:	Gray
RAL:	RAL7043
Diffuser/Glass Material:	Tempered glass
Diffuser/Glass Shape:	Flat
Diffuser/Glass Characteristic:	5mm thickness
Lens Material:	clear Acrylic
Light Distribution:	Street lighting
Gasket Material:	silicon
Gasket Characteristic:	High thermal resistance
Interior Connection Material:	Galvanized coated
Exterior Connection Material:	Dacromet coated
Packaging type:	Nylon cover and carton
Other Characteristics:	Sturdy gray powder coated swivel base with scale and stainless steel bolts for adjusting the floodlight to the desired angle
Weight(Kg):	9
Dimensions(mm):	Ø515x110
Luminaire mechanical impact resistance:	IK08

M313ULED7740-S

SATURN street light, 4000K, LED7, 22000 Lumens, 150W, Gray

Photometric Graph

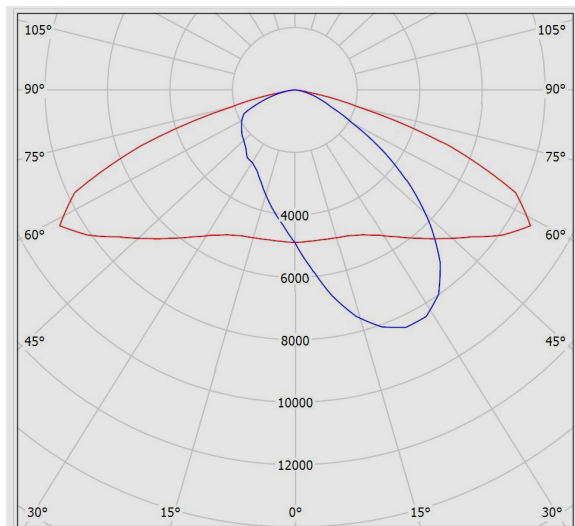

Dimensional Drawing

