


M313NLED10750-S

SATURN floodlight, Narrow light distribution, 5000K, LED10, 36000 Lumens, 240W, Gray



About Product

SATURN floodlight, street and tunnel luminaire is Mazinoor state of the art design suitable for floodlighting and tunnel and street light application. High pressure die-cast aluminum body and high ingress protection (IP66) are among the highlights of this luminaire.



Technical Information

Catalogue Code/product code:	M313NLED10750-S
Mounting Type:	Horizontal boom mounting, Wall Mounted; Surface Mounted
Application:	Parking, Facade and architectural lighting
Light source type:	LED
Module/ Lamp quantity:	4
CCT (Color temperature):	5000K - Daylight
Light source:	LED
Lumen maintenance:	> 100.000 hours
Lumen maintenance factor:	L80
CRI (Color rendering index):	> 70
Power Consumption:	240
Luminous Flux:	36000
Efficacy (lm/W):	150
IP (Ingress Protection):	IP66
Insulation Class:	Class I
Max. Ambient Temperature:	+45°C
Min. Ambient Temperature:	-30°C
Ballast/ Driver:	Constant Current Driver (PF> 0.9)
Ballast/ driver Spec:	Dimmable (1-10V)
Ballast/ Driver (Channel quantity):	Single channel


M313NLED10750-S
SATURN floodlight, Narrow light distribution, 5000K, LED10, 36000 Lumens, 240W, Gray

Mains voltage:	100~277 VAC, 100~277 VAC±10%
Voltage Frequency:	50/60 Hz
Wire / Cable Spec:	PVC solid wire
Wire cross section:	0.5
Terminal material:	Polycarbonate
Terminal Spec:	3-Pole (Size: 2.5)
Socket & Plug:	Polyamide
Socket & Plug Spec:	3-Pole (Size: 2.5)
Cable Gland Spec:	Polyamide
Cable gland type:	PG13.5
Body Material:	Die-Cast aluminum
Body Coating:	Powder coated
Body Color:	Gray
RAL:	RAL7043
Body Characteristic:	Adjustable to desired angle
Diffuser/Glass Material:	Tempered glass
Diffuser/Glass Shape:	Clear
Diffuser/Glass Characteristic:	5mm thickness, High thermal resistance, High mechanical resistant
Lens Material:	Clear polycarbonate
Light Distribution:	25 degrees
Gasket Material:	silicon
Gasket Characteristic:	High thermal resistance, Resistant to pressure
Bracket Material:	Galvanized steel sheet
Interior Connection Material:	Galvanized coated
Exterior Connection Material:	Dacromet coated
Packaging type:	Nylon cover and carton
Other Characteristics:	Sturdy gray powder coated swivel base with scale and stainless steel bolts for adjusting the floodlight to the desired angle
Weight(Kg):	9.2
Dimensions(mm):	Ø515x110
Luminaire mechanical impact resistance:	IK08

M313NLED10750-S

SATURN floodlight, Narrow light distribution, 5000K, LED10, 36000 Lumens, 240W, Gray

Photometric Graph

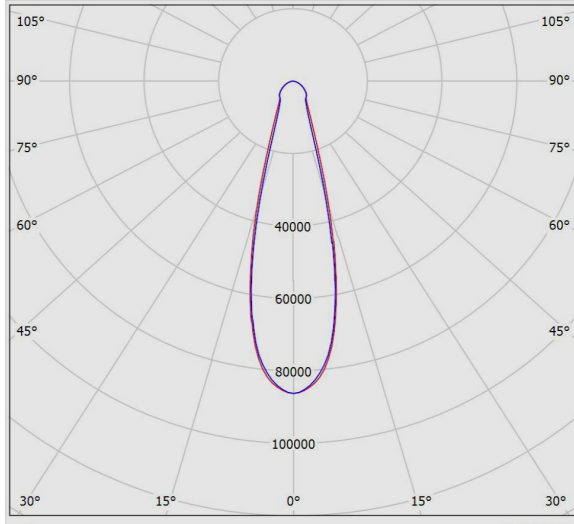

Dimensional Drawing

