


**ARTEMIS recessed Super Comfort Downlight, 10cm Dia., Medium beam angle, 4000k, LED3, 1300 Lumens, 13W, White**

**About Product**

---

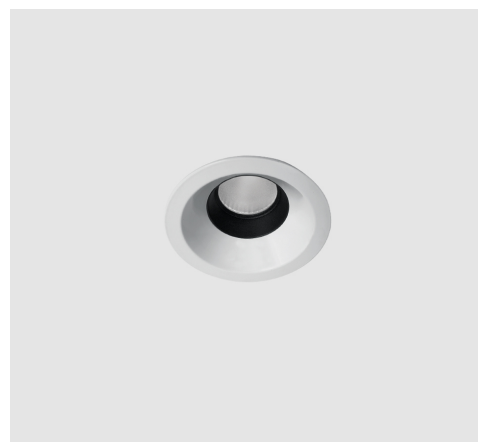


**Technical Information**

---

## ARTEMIS recessed Super Comfort Downlight, 10cm Dia., Medium beam angle, 4000k, LED3, 1300 Lumens, 13W, White

### Photometric Graph

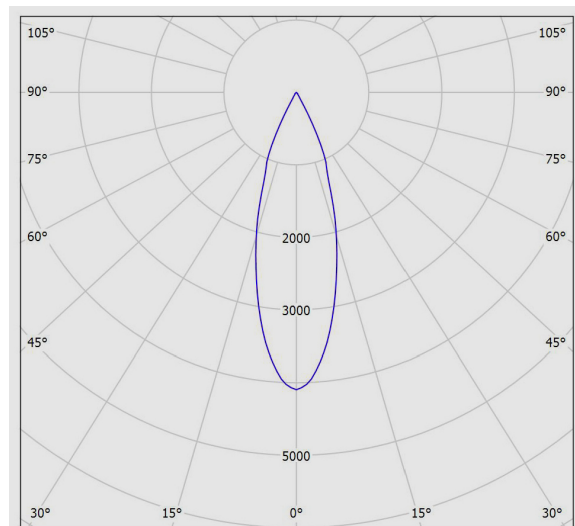

Glare Evaluation According to UGR												
		70	70	50	50	30	70	70	50	50	30	30
p Ceiling		50	30	50	30	30	50	30	50	30	30	30
p Walls		20	20	20	20	20	20	20	20	20	20	20
p Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.4	-5.8	-6.2	-5.6	-5.4	-6.4	-5.8	-6.2	-5.6	-5.4	-5.4
	3H	-6.6	-6.0	-6.3	-5.8	-5.5	-6.6	-6.0	-6.3	-5.8	-5.5	-5.5
	4H	-6.6	-6.1	-6.4	-5.8	-5.6	-6.6	-6.1	-6.4	-5.8	-5.6	-5.6
	6H	-6.7	-6.2	-6.4	-5.9	-5.7	-6.7	-6.2	-6.4	-5.9	-5.7	-5.7
	8H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	-5.7
4H	12H	-6.8	-6.3	-6.5	-6.0	-5.7	-6.8	-6.3	-6.5	-6.0	-5.7	-5.7
	2H	-6.6	-6.1	-6.4	-5.8	-5.6	-6.6	-6.1	-6.4	-5.8	-5.6	-5.6
	3H	-6.8	-6.3	-6.5	-6.0	-5.7	-6.8	-6.3	-6.5	-6.0	-5.7	-5.7
	4H	-6.9	-6.5	-6.5	-6.1	-5.8	-6.9	-6.5	-6.5	-6.1	-5.8	-5.8
	6H	-6.9	-6.6	-6.5	-6.3	-5.9	-6.9	-6.6	-6.5	-6.3	-5.9	-5.9
8H	8H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9	-5.9
	12H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	-6.0
	4H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9	-5.9
	6H	-7.1	-6.9	-6.6	-6.4	-6.0	-7.1	-6.9	-6.6	-6.4	-6.0	-6.0
	8H	-7.1	-6.9	-6.7	-6.5	-6.0	-7.1	-6.9	-6.7	-6.5	-6.0	-6.0
12H	12H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1	-6.1
	4H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	-6.0
	6H	-7.1	-6.9	-6.7	-6.5	-6.0	-7.1	-6.9	-6.7	-6.5	-6.0	-6.0
	8H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1	-6.1
Variation of the observer position for the luminance distances S												
S = 1.0H		+4.8 / -8.3					+4.8 / -8.3					
S = 1.5H		+7.5 / -86.0					+7.5 / -86.0					
S = 2.0H		+9.5 / -84.0					+9.5 / -84.0					
Standard table		BK00					BK00					
Correction		-15.2					-15.2					
Summand												
Corrected Glare Indices referring to 1300lm Total Luminous Flux												

### Dimensional Drawing

