

**SEALIUM dust and moisture proof linear LED luminaire, with Double Asymmetrical beam angle,  
Length: 60cm, 6500K, LED2, 2400 Lumens, 25W, Silver**

### About Product

---

SEALIUM dust & moisture proof linear luminaire is Mazinoor state of the art design suitable for various dusty and humid industrial and parking lot lighting applications. Aesthetically beautiful design, durability, UV free, high impact and thermal resistance, various light distribution, high efficacy, ease of installation and maintenance, energy saving, environment friendliness, and high ingress protection (IP66) are among the highlights of this luminaire.




### Technical Information

---

## SEALIUM dust and moisture proof linear LED luminaire, with Double Asymmetrical beam angle, Length: 60cm, 6500K, LED2, 2400 Lumens, 25W, Silver

### Photometric Graph

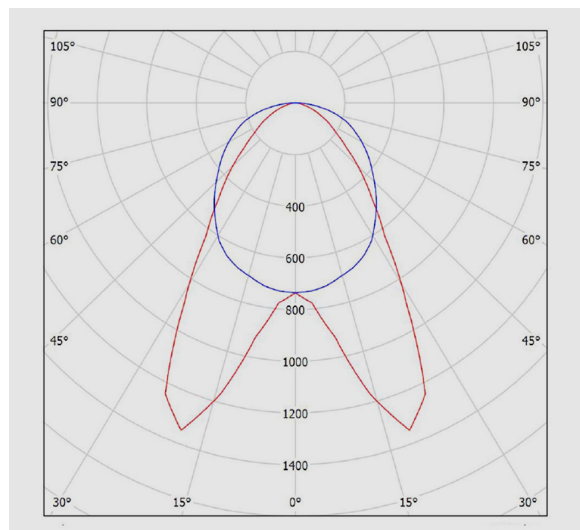

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	30	70	70	50	50	30
p Walls		50	30	50	30	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	18.3	19.5	18.6	19.7	20.0	23.2	24.4	23.5	24.6	24.8	
	3H	18.8	19.8	19.1	20.1	20.3	24.6	25.7	24.9	25.0	26.2	
	4H	18.9	19.9	19.2	20.1	20.4	25.2	26.2	25.5	26.4	26.7	
	6H	18.9	19.8	19.2	20.1	20.4	25.5	26.5	25.9	26.8	27.1	
	8H	18.9	19.8	19.2	20.1	20.4	25.7	26.6	26.0	26.9	27.2	
4H	12H	18.8	19.7	19.2	20.0	20.3	25.8	26.6	26.1	26.9	27.3	
	2H	19.2	20.2	19.5	20.5	20.8	23.2	24.2	23.5	24.5	24.8	
	3H	19.8	20.5	20.1	20.9	21.3	24.8	25.6	25.2	26.0	26.3	
	4H	19.9	20.7	20.3	21.0	21.4	25.4	26.2	25.8	26.5	26.9	
	6H	20.0	20.6	20.4	21.0	21.4	25.9	26.6	26.3	26.9	27.3	
6H	8H	20.0	20.6	20.4	21.0	21.4	26.1	26.7	26.5	27.1	27.5	
	12H	20.0	20.5	20.4	20.9	21.3	26.2	26.8	26.7	27.2	27.6	
	4H	20.2	20.8	20.7	21.2	21.6	25.4	26.0	25.8	26.4	26.8	
	6H	20.3	20.8	20.8	21.2	21.7	25.9	26.4	26.4	26.8	27.3	
	8H	20.3	20.8	20.8	21.2	21.7	26.1	26.6	26.6	27.0	27.5	
12H	12H	20.3	20.7	20.8	21.2	21.7	26.3	26.7	26.8	27.2	27.7	
	4H	20.3	20.8	20.7	21.2	21.6	25.4	25.9	25.8	26.3	26.7	
	6H	20.4	20.8	20.9	21.3	21.7	25.9	26.3	26.4	26.8	27.2	
	8H	20.4	20.8	20.9	21.2	21.7	26.1	26.5	26.6	27.0	27.4	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.8 / -0.9					+0.5 / -0.6					
S = 1.5H		+1.2 / -1.8					+0.7 / -0.9					
S = 2.0H		+1.6 / -2.8					+1.4 / -1.1					
Standard table		BK02					BK05					
Correction		2.1					9.2					
Summand												
Corrected Glare Indices referring to 2400lm Total Luminous Flux												

### Dimensional Drawing

