


M527SLED2PS840-W

LEDiLUX recessed light panel (60*60), Satin white diffuser, 4000K, LED2, 4500 Lumens, 29W, White



About Product

LEDiLUX recessed light panel is designed and manufactured by Mazinoor for modern office and commercial lighting applications. Uniform light distribution, energy saving, glare control, and aesthetically beautiful design are among the highlights of this luminaire.

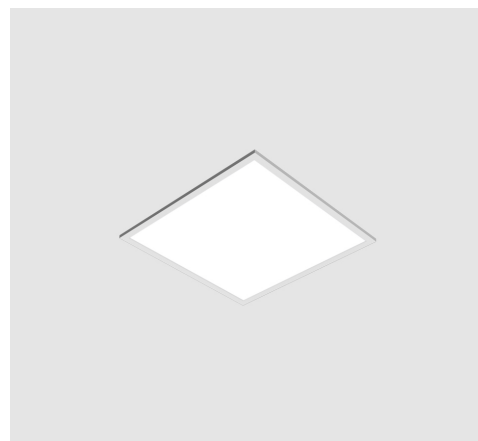

Technical Information

Catalogue Code/product code:	M527SLED2PS840-W
Mounting Type:	Recessed-Exposed false ceiling
Application:	Hospitality, Office
Light source type:	LED
Module/ Lamp quantity:	2
CCT (Color temperature):	4000K - Neutral White
Light source:	LED
Lumen maintenance:	> 100.000 hours
Lumen maintenance factor:	L70
CRI (Color rendering index):	> 80
Power Consumption:	29
Luminous Flux:	4500
Efficacy (lm/W):	155
IP (Ingress Protection):	IP43 (Underside)
Insulation Class:	Class I
Ballast/ Driver:	Constant Current Driver (PF> 0.9)
FLICKER:	Flicker Free
Ballast/ driver Spec:	Non-dimmable
Ballast/ Driver (Channel quantity):	Single channel
Mains voltage:	220~240 VAC±10%

M527SLED2PS840-W


LEDiLUX recessed light panel (60*60), Satin white diffuser, 4000K, LED2, 4500 Lumens, 29W, White

Voltage Frequency:	50/60 Hz
Wire / Cable Spec:	PVC solid wire
Wire cross section:	0.5
Terminal material:	Polycarbonate
Terminal Spec:	Cable looping is possible, 3-Pole (Size: 2.5), Tool free wire connection
Cable Looping:	Yes
Body Material:	Cold rolled steel sheet with extruded aluminum rim
Body Coating:	Powder coated
Body Color:	White
RAL:	RAL9003
Diffuser/Glass Material:	Polystyrene sheet
Diffuser/Glass Shape:	Satin white
Diffuser/Glass Characteristic:	Optimum efficacy and high light source hiding for glare control, Uniform and symmetrical light distribution, Glare control
Light Distribution:	Uniform light distribution
Packaging type:	Nylon cover and carton
Order Option:	Dimmable driver, Emergency battery
Weight(Kg):	4.4
Dimensions(mm):	597x597x12

M527SLED2PS840-W

LEDiLUX recessed light panel (60*60), Satin white diffuser, 4000K, LED2, 4500 Lumens, 29W, White

Photometric Graph

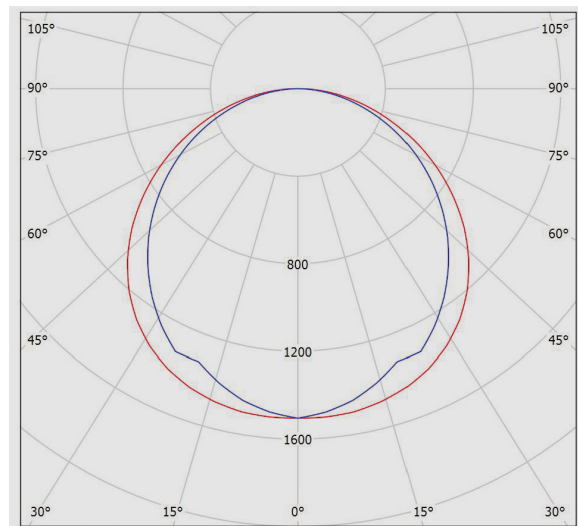

Dimensional Drawing

