


## **AURORA recessed emergency light with UPS, Anti-panic lighting, Non-maintained, 4000K, LED2, 250 lumens, 3W, White**

### **About Product**

---

AURORA emergency light is designed and manufactured by Mazinoor with different lens options for providing enough light in case of power outage or escape pathway emergency lighting.

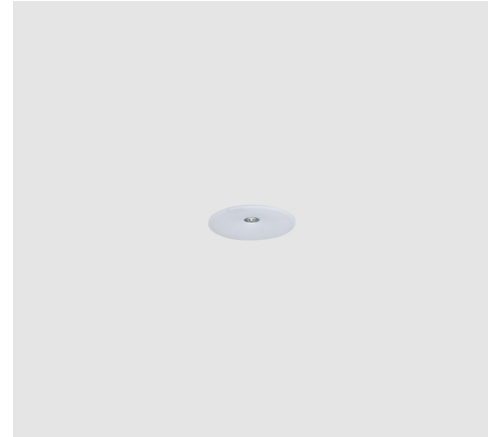


### **Technical Information**

---

AURORA recessed emergency light with UPS, Anti-panic lighting, Non-maintained, 4000K, LED2, 250 lumens, 3W, White

Photometric Graph

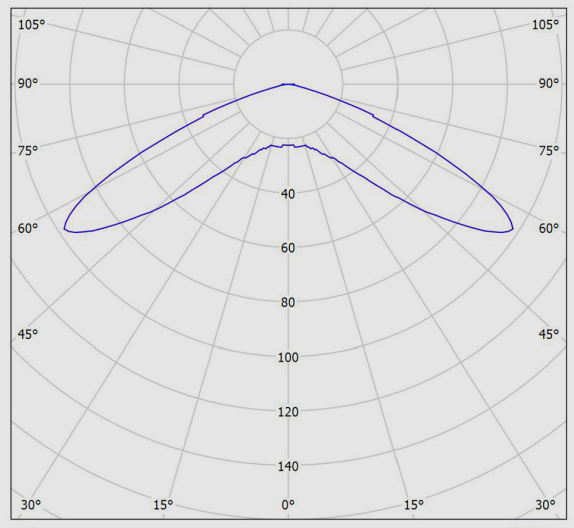

Glare Evaluation According to UGR												
ρ Ceiling	70	70	50	50	30	70	70	50	50	30		
ρ Walls	50	30	50	30	30	50	30	50	30	30		
ρ Floor	20	20	20	20	20	20	20	20	20	20		
Room Size X      Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	17.8	19.5	18.2	19.8	20.0	17.8	19.5	18.2	19.8	20.0	
	3H	18.5	20.0	18.9	20.3	20.6	18.5	20.0	18.9	20.3	20.6	
	4H	18.5	19.9	18.9	20.2	20.6	18.5	19.9	18.9	20.2	20.6	
	6H	18.5	19.8	18.8	20.1	20.4	18.5	19.8	18.8	20.1	20.4	
	8H	18.4	19.7	18.8	20.0	20.3	18.4	19.7	18.8	20.0	20.3	
4H	12H	18.4	19.6	18.8	19.9	20.3	18.4	19.6	18.8	19.9	20.3	
	2H	18.4	19.8	18.8	20.1	20.4	18.4	19.8	18.8	20.1	20.4	
	3H	19.1	20.3	19.5	20.7	21.0	19.1	20.3	19.5	20.7	21.0	
	4H	19.2	20.2	19.6	20.6	21.0	19.2	20.2	19.6	20.6	21.0	
	6H	19.1	20.1	19.6	20.4	20.8	19.1	20.1	19.6	20.4	20.8	
8H	8H	19.1	20.0	19.5	20.4	20.8	19.1	20.0	19.5	20.4	20.8	
	12H	19.1	19.8	19.5	20.3	20.7	19.1	19.8	19.5	20.3	20.7	
	4H	19.1	20.0	19.6	20.4	20.8	19.1	20.0	19.6	20.4	20.8	
	6H	19.1	19.8	19.6	20.2	20.7	19.1	19.8	19.6	20.2	20.7	
	8H	19.1	19.7	19.6	20.2	20.6	19.1	19.7	19.6	20.2	20.6	
12H	12H	19.1	19.6	19.6	20.1	20.6	19.1	19.6	19.6	20.1	20.6	
	4H	19.1	19.9	19.6	20.3	20.7	19.1	19.9	19.6	20.3	20.7	
	6H	19.1	19.7	19.6	20.1	20.6	19.1	19.7	19.6	20.1	20.6	
	8H	19.1	19.6	19.6	20.1	20.6	19.1	19.6	19.6	20.1	20.6	
	12H	19.1	19.6	19.6	20.1	20.6	19.1	19.6	19.6	20.1	20.6	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.4 / -0.3					+0.4 / -0.3					
S = 1.5H		+1.4 / -1.5					+1.4 / -1.5					
S = 2.0H		+2.1 / -3.5					+2.1 / -3.5					
Standard table		BK02					BK02					
Correction		1.6					1.6					
Summand												
Corrected Glare Indices referring to 250lm Total Luminous Flux												

Dimensional Drawing

