

**HONEY track light with lens (Single-pole), Medium beam angle, 7.5-cm Dia., 4000K, LED2, 2200 Lumens, 20W, Black**

**About Product**

---




**Technical Information**

---

## HONEY track light with lens (Single-pole), Medium beam angle, 7.5-cm Dia., 4000K, LED2, 2200 Lumens, 20W, Black

### Photometric Graph

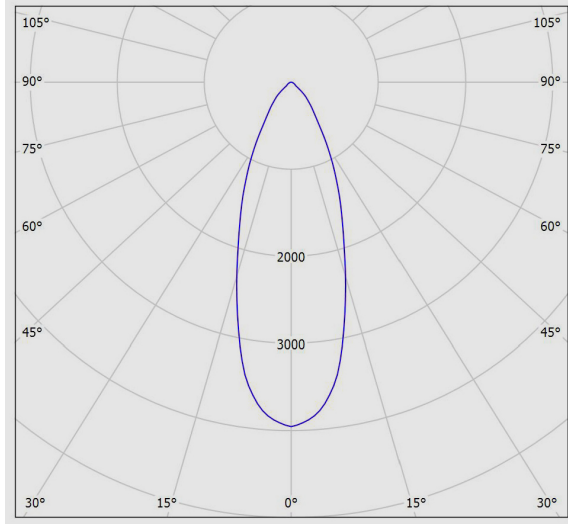

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size	X	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	1.1	1.9	1.3	2.1	2.3	1.1	1.9	1.3	2.1	2.3	
	3H	2.4	3.2	2.7	3.4	3.6	2.4	3.2	2.7	3.4	3.6	
	4H	2.9	3.6	3.3	3.9	4.1	2.9	3.6	3.3	3.9	4.1	
	6H	3.5	4.1	3.8	4.4	4.7	3.5	4.1	3.8	4.4	4.7	
	8H	3.7	4.3	4.0	4.6	4.9	3.7	4.3	4.0	4.6	4.9	
4H	2H	1.6	2.2	1.9	2.5	2.7	1.6	2.2	1.9	2.5	2.7	
	3H	3.1	3.7	3.5	4.0	4.3	3.1	3.7	3.5	4.0	4.3	
	4H	3.8	4.3	4.2	4.6	4.9	3.8	4.3	4.2	4.6	4.9	
	6H	4.5	4.9	4.9	5.2	5.6	4.5	4.9	4.9	5.2	5.6	
	8H	4.7	5.1	5.1	5.5	5.9	4.7	5.1	5.1	5.5	5.9	
8H	2H	4.9	5.3	5.4	5.7	6.1	4.9	5.3	5.4	5.7	6.1	
	4H	4.0	4.4	4.5	4.8	5.2	4.0	4.4	4.5	4.8	5.2	
	6H	4.9	5.2	5.3	5.6	6.0	4.9	5.2	5.3	5.6	6.0	
	8H	5.2	5.5	5.7	5.9	6.4	5.2	5.5	5.7	5.9	6.4	
	12H	5.5	5.7	6.0	6.2	6.7	5.5	5.7	6.0	6.2	6.7	
12H	4H	4.1	4.4	4.5	4.8	5.2	4.1	4.4	4.5	4.8	5.2	
	6H	4.9	5.2	5.4	5.6	6.1	4.9	5.2	5.4	5.6	6.1	
	8H	5.4	5.6	5.8	6.0	6.5	5.4	5.6	5.8	6.0	6.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+1.7	-2.1		+1.7	-2.1		+1.7	-2.1		+1.7	-2.1
S = 1.5H		+3.5	-2.4		+3.5	-2.4		+3.5	-2.4		+3.5	-2.4
S = 2.0H		+5.2	-2.9		+5.2	-2.9		+5.2	-2.9		+5.2	-2.9
Standard table		BK02					BK02					
Correction		-13.4					-13.4					
Summand		-13.4					-13.4					
Corrected Glare Indices referring to 2200lm Total Luminous Flux												

### Dimensional Drawing

