


M450C60LED2865

ENDURA LED Dust & Moisture proof Luminaire, Length: 60cm, 6500K, LED2, 2200 Lumens, 17W



About Product

ENDURA dust & moisture proof linear luminaire is Mazinoor state of the art design suitable for harsh conditions of heavy industrial areas in which plastic parts can not be used. Aesthetically beautiful design, durability, UV free, high impact and chemical resistance, high efficacy, ease of installation and maintenance, energy saving, environment friendliness, and high ingress protection (IP66) are among the highlights of this luminaire.




Technical Information

M450C60LED2865

ENDURA LED Dust & Moisture proof Luminaire, Length: 60cm, 6500K, LED2, 2200 Lumens, 17W

Photometric Graph

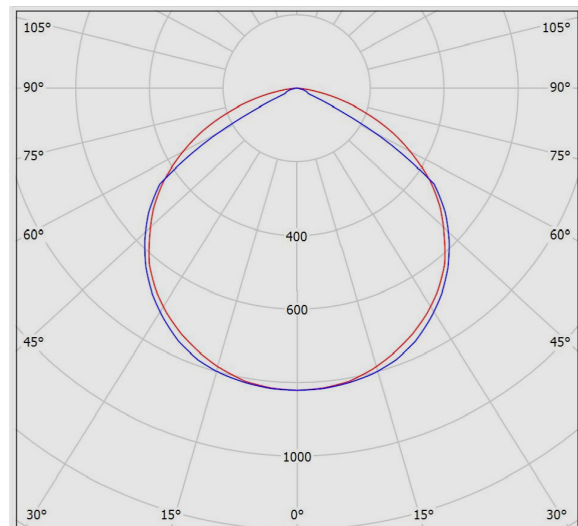

Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	19.5	20.8	19.8	21.0	21.2	20.8	22.0	21.1	22.3	22.5
	3H	20.4	21.5	20.7	21.8	22.1	20.7	21.8	21.0	22.0	22.3
	4H	20.6	21.7	21.0	22.0	22.2	20.6	21.6	20.9	21.9	22.2
	6H	20.7	21.7	21.0	21.9	22.3	20.5	21.5	20.9	21.8	22.1
	8H	20.7	21.6	21.0	21.9	22.2	20.5	21.4	20.8	21.7	22.0
4H	12H	20.6	21.5	21.0	21.8	22.2	20.4	21.3	20.8	21.7	22.0
	2H	20.1	21.1	20.4	21.4	21.7	21.0	22.1	21.4	22.3	22.6
	3H	21.0	21.9	21.4	22.2	22.6	20.9	21.8	21.3	22.1	22.5
	4H	21.3	22.1	21.7	22.4	22.8	20.9	21.6	21.3	22.0	22.4
	6H	21.4	22.1	21.8	22.4	22.8	20.8	21.5	21.2	21.9	22.3
6H	8H	21.4	22.0	21.8	22.4	22.8	20.8	21.4	21.2	21.8	22.2
	12H	21.4	21.9	21.8	22.3	22.8	20.8	21.3	21.2	21.7	22.1
	4H	21.2	21.8	21.7	22.2	22.6	20.8	21.5	21.3	21.8	22.3
	6H	21.3	21.8	21.8	22.2	22.7	20.8	21.3	21.2	21.7	22.2
	8H	21.3	21.8	21.8	22.2	22.7	20.8	21.2	21.2	21.6	22.1
12H	12H	21.3	21.7	21.8	22.1	22.6	20.7	21.1	21.2	21.6	22.1
	4H	21.2	21.7	21.6	22.2	22.6	20.8	21.4	21.3	21.8	22.2
	6H	21.3	21.7	21.8	22.2	22.6	20.8	21.2	21.2	21.6	22.1
8H	8H	21.3	21.7	21.8	22.1	22.6	20.7	21.1	21.2	21.6	22.1
	12H	21.3	21.7	21.8	22.1	22.6	20.7	21.1	21.2	21.6	22.1
Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.3 / -0.4					+0.5 / -0.4				
S = 1.5H		+0.5 / -1.0					+2.0 / -4.2				
S = 2.0H		+1.0 / -2.0					+3.6 / -11.8				
Standard table		BK03					BK01				
Correction Summand		3.8					3.1				
Corrected Glare Indices referring to 2200lm Total Luminous Flux											

Dimensional Drawing

