



Mazinoor

Different Experience Beyond Illumination

APOLO 250W mercury vapor Dust & Moisture proof industrial high-bay reflector, D2 striped anodized aluminium reflector, flat clear tempered diffuser with threaded hook


About Product



Technical Information

APOLO 250W mercury vapor Dust & Moisture proof industrial high-bay reflector, D2 striped anodized aluminium reflector, flat clear tempered diffuser with threaded hook

Photometric Graph

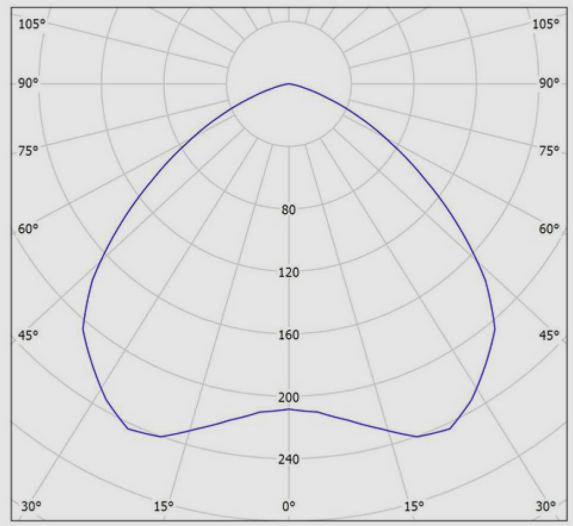

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	19.5	20.7	19.8	20.9	21.1	19.5	20.7	19.8	20.9	21.1	
	3H	20.1	21.2	20.4	21.4	21.7	20.1	21.2	20.4	21.4	21.7	
	4H	20.2	21.2	20.5	21.4	21.7	20.2	21.2	20.5	21.4	21.7	
	6H	20.2	21.1	20.5	21.4	21.7	20.2	21.1	20.5	21.4	21.7	
	8H	20.1	21.0	20.5	21.3	21.6	20.1	21.0	20.5	21.3	21.6	
4H	12H	20.1	20.9	20.5	21.2	21.6	20.1	20.9	20.5	21.2	21.6	
	2H	19.7	20.7	20.1	21.0	21.3	19.7	20.7	20.1	21.0	21.3	
	3H	20.4	21.3	20.8	21.6	21.9	20.4	21.3	20.8	21.6	21.9	
	4H	20.6	21.3	20.9	21.6	22.0	20.6	21.3	20.9	21.6	22.0	
	6H	20.6	21.2	21.0	21.6	21.9	20.6	21.2	21.0	21.6	21.9	
8H	12H	20.5	21.1	21.0	21.5	21.9	20.5	21.1	21.0	21.5	21.9	
	2H	20.5	21.0	21.0	21.4	21.9	20.5	21.0	21.0	21.4	21.9	
	4H	20.5	21.1	21.0	21.5	21.9	20.5	21.1	21.0	21.5	21.9	
	6H	20.6	21.0	21.0	21.4	21.9	20.6	21.0	21.0	21.4	21.9	
	8H	20.5	20.9	21.0	21.4	21.9	20.5	20.9	21.0	21.4	21.9	
12H	12H	20.5	20.9	21.0	21.3	21.8	20.5	20.9	21.0	21.3	21.8	
	4H	20.5	21.0	21.0	21.4	21.9	20.5	21.0	21.0	21.4	21.9	
	6H	20.5	20.9	21.0	21.4	21.9	20.5	20.9	21.0	21.4	21.9	
	8H	20.5	20.9	21.0	21.3	21.8	20.5	20.9	21.0	21.3	21.8	
	12H	20.5	20.9	21.0	21.3	21.8	20.5	20.9	21.0	21.3	21.8	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.4 / -0.6					+0.4 / -0.6					
S = 1.5H		+0.9 / -1.6					+0.9 / -1.6					
S = 2.0H		+1.9 / -3.0					+1.9 / -3.0					
Standard table		BK02					BK02					
Correction		-6.9					-6.9					
Summand												
Corrected Glare Indices referring to 13000lm Total Luminous Flux												

Dimensional Drawing

