

## M468MLED4V30-W

**NOVATRON ViVo surface mount, Medium light distribution, 9-cm Dia., 3000K, LED4, 3900 Lumens, 38W, White**



### About Product

NOVATRON surface mount luminaire is Mazinoor state of the art design suitable for modern retail shop and commercial lighting applications. Directed light distribution, energy saving, glare control, and aesthetically beautiful design are among the highlights of this luminaire.



### Technical Information

Catalogue Code/product code:	M468MLED4V30-W
Mounting Type:	Surface Mounted
Application:	Shopping centers, Hypermarket, Gallery and museum
Light source type:	LED
Module/ Lamp quantity:	1
CCT (Color temperature):	3000K - Warm White
Light source:	LED
Lumen maintenance:	> 100.000 hours
Lumen maintenance factor:	L85
CRI (Color rendering index):	> 90
Power Consumption:	38
Luminous Flux:	3900
Efficacy (lm/W):	103
IP (Ingress Protection):	-
Insulation Class:	Class I
Ballast/ Driver:	Constant Current Driver (PF> 0.9)
FLICKER:	Flicker Free
Ballast/ driver Spec:	Non-dimmable
Control method options:	DALI, Push, On/Off
Ballast/ Driver (Channel quantity):	Single channel

## M468MLED4V30-W


### NOVATRON ViVo surface mount, Medium light distribution, 9-cm Dia., 3000K, LED4, 3900 Lumens, 38W, White

Mains voltage:	220~240 VAC±10%
Voltage Frequency:	50/60 Hz
Wire / Cable Spec:	PVC solid wire
Wire cross section:	0.5
Terminal material:	Polycarbonate
Terminal Spec:	Tool free wire connection, Cable looping is possible, 3-Pole (Size: 2.5)
Body Material:	Die-Cast aluminum
Body Coating:	Powder coated
Body Color:	White
RAL:	RAL9003
Reflector Material:	Polycarbonate
Reflector Coating:	Vacuum coat
Diffuser/Glass Material:	Acrylic sheet
Diffuser/Glass Shape:	Clear
Light Distribution:	42 degrees
Packaging type:	Nylon cover and carton
Order Option (non-Routine):	Wallwashing optics, Satin white diffuser, Optional Optics for removing excess light halos, 6500K color temperature with CRI80
Weight(Kg):	1.1
Dimensions(mm):	Ø95x140
Luminaire mechanical impact resistance:	-
Other/Spare parts:	4x50 screws (4 pcs.), Wall plugs

## M468MLED4V30-W

**NOVATRON ViVo surface mount, Medium light distribution, 9-cm Dia., 3000K, LED4, 3900 Lumens, 38W, White**

### Photometric Graph

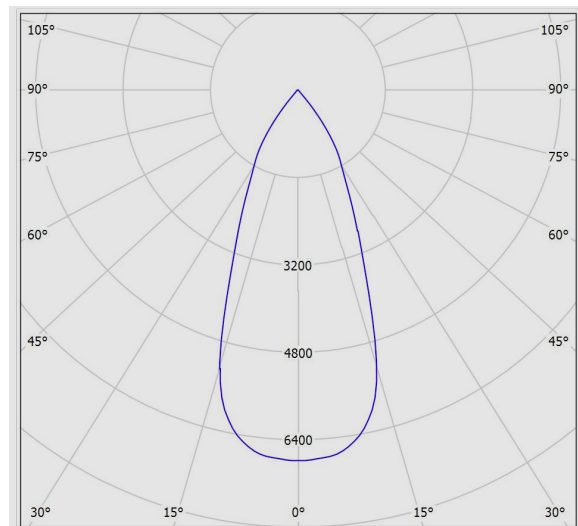

### Dimensional Drawing

