

NOVATRON ViVo track light (Single-pole), Adjustable beam angles, 6-cm Dia., 4000K, LED1, 650/1000 Lumens, 20W, White


About Product



Technical Information

NOVATRON ViVo track light (Single-pole), Adjustable beam angles, 6-cm Dia., 4000K, LED1, 650/1000 Lumens, 20W, White

Photometric Graph

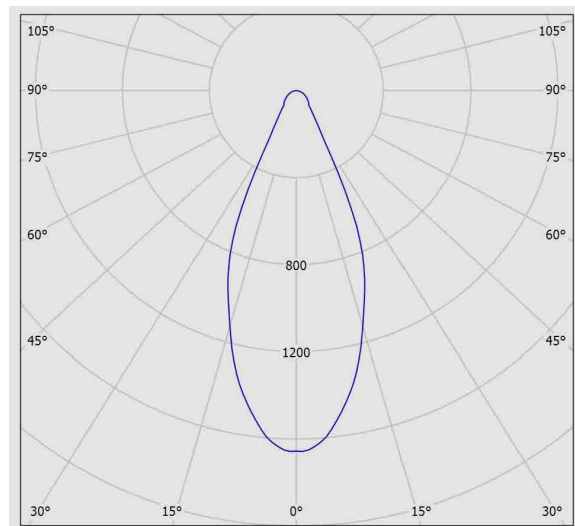

Glare Evaluation According to UGR

p Ceiling	70	70	50	50	30	70	70	50	50	30	
p Walls	50	30	50	30	30	50	30	50	30	30	
p Floor	20	20	20	20	20	20	20	20	20	20	
Room Size X	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	17.8	18.7	18.1	18.9	19.1	17.8	18.7	18.1	18.9	19.1
3H	3H	19.3	20.1	19.6	20.3	20.5	19.3	20.1	19.6	20.3	20.5
4H	4H	19.8	20.5	20.1	20.8	21.1	19.8	20.5	20.1	20.8	21.1
6H	6H	20.1	20.8	20.5	21.1	21.4	20.1	20.8	20.5	21.1	21.4
8H	8H	20.3	20.9	20.6	21.2	21.5	20.3	20.9	20.6	21.2	21.5
12H	12H	20.3	20.9	20.7	21.2	21.6	20.3	20.9	20.7	21.2	21.6
4H	2H	18.3	19.0	18.6	19.3	19.6	18.3	19.0	18.6	19.3	19.6
3H	3H	19.9	20.6	20.3	20.9	21.2	19.9	20.6	20.3	20.9	21.2
4H	4H	20.6	21.1	21.0	21.5	21.8	20.6	21.1	21.0	21.5	21.8
6H	6H	21.0	21.5	21.4	21.8	22.2	21.0	21.5	21.4	21.8	22.2
8H	8H	21.2	21.6	21.6	22.0	22.4	21.2	21.6	21.6	22.0	22.4
12H	12H	21.3	21.6	21.7	22.0	22.5	21.3	21.6	21.7	22.0	22.5
8H	4H	20.8	21.2	21.2	21.6	22.0	20.8	21.2	21.2	21.6	22.0
6H	6H	21.3	21.6	21.8	22.0	22.5	21.3	21.6	21.8	22.0	22.5
8H	8H	21.5	21.8	22.0	22.2	22.7	21.5	21.8	22.0	22.2	22.7
12H	12H	21.7	21.9	22.1	22.3	22.8	21.7	21.9	22.1	22.3	22.8
12H	4H	20.8	21.1	21.2	21.5	22.0	20.8	21.1	21.2	21.5	22.0
6H	6H	21.3	21.6	21.8	22.1	22.5	21.3	21.6	21.8	22.1	22.5
8H	8H	21.6	21.8	22.1	22.3	22.8	21.6	21.8	22.1	22.3	22.8
Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.3 / -0.3					+0.3 / -0.3				
S = 1.5H		+0.8 / -0.6					+0.8 / -0.6				
S = 2.0H		+1.4 / -1.0					+1.4 / -1.0				
Standard table		BK04					BK04				
Correction Summand		4.0					4.0				
Corrected Glare Indices referring to 1000lm Total Luminous Flux											

Dimensional Drawing

