



M219D3APLED2EPN840-W

AURORA recessed emergency light, Self Contained, Anti-panic lighting, Non-maintained, 4000K, LED2, 250 lumens, 2W, White



About Product

AURORA emergency light is designed and manufactured by Mazinoor with different lens options for providing enough light in case of power outage or escape pathway emergency lighting.

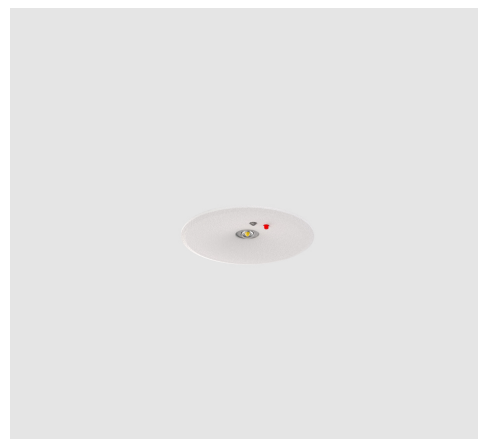

Technical Information

Catalogue Code/product code:	M219D3APLED2EPN840-W
Mounting Type:	Recessed-Gypsum false ceiling, Recessed-Exposed false ceiling, Recessed-Concealed false ceiling
Application:	Shopping centers, Hypermarket, Emergency, Industrial area, Gallery and museum, Sports area, Office, Hospitality
Light source type:	LED
Module/ Lamp quantity:	1
CCT (Color temperature):	4000K - Neutral White
Light source:	LED
Lumen maintenance:	> 100.000 hours
Lumen maintenance factor:	L90
CRI (Color rendering index):	> 80
Power Consumption:	Emergency Mode :2
Luminous Flux:	250
Efficacy (lm/W):	125
IP (Ingress Protection):	IP43 (Underside)
Insulation Class:	Class II
Max. Ambient Temperature:	45°C
FLICKER:	-
Mains voltage:	220~240 VAC
Voltage Frequency:	50/60 Hz


M219D3APLED2EPN840-W
AURORA recessed emergency light, Self Contained, Anti-panic lighting, Non-maintained, 4000K, LED2, 250 lumens, 2W, White

Battery Type:	Ni-Cd
Battery Spec:	3.6V*3*1.5Ah
Inverter/converter:	Non-maintained; 3 hour
Wire / Cable Spec:	PVC flexible wire
Wire cross section:	0.5
Terminal material:	Polycarbonate
Terminal Spec:	Tool free wire connection, 2 pole (Size: 2.5), Cable looping is possible
Cable Looping:	Yes
Body Material:	Die-Cast aluminum
Body Coating:	Powder coated
Body Color:	White
RAL:	RAL9003
Lens Material:	Clear polycarbonate
Light Distribution:	symmetric beam angle for anti-panic
Gasket Material:	silicon
Gasket Characteristic:	Ingress protection against dust and moisture. Resistant to pressure
Clamp Material:	Stainless steel clips
Clamp Characteristic:	Installing the luminaire with adjustment possibility to fit different false ceiling thicknesses
Packaging type:	Nylon cover and carton
Order Option:	Addressable emergency light conversion kit (Converter) via central battery, Addressable emergency light conversion kit (Converter) via self-contained battery
Weight(Kg):	0.5
Dimensions(mm):	ø94X25
Luminaire mechanical impact resistance:	IK07

M219D3APLED2EPN840-W

AURORA recessed emergency light, Self Contained, Anti-panic lighting, Non-maintained, 4000K, LED2, 250 lumens, 2W, White

Photometric Graph

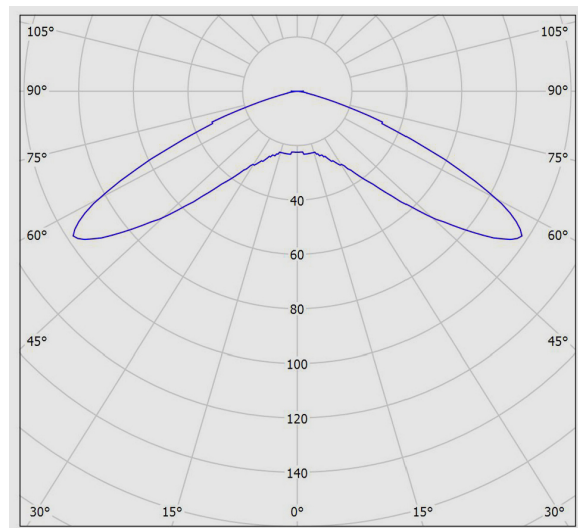

Glare Evaluation According to UGR												
		70	70	50	50	30	70	70	50	50	30	
ρ Ceiling		50	30	50	30	30	50	30	50	30	30	
ρ Walls		20	20	20	20	20	20	20	20	20	20	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	17.8	19.5	18.2	19.8	20.0	17.8	19.5	18.2	19.8	20.0	
	3H	18.5	20.0	18.9	20.3	20.6	18.5	20.0	18.9	20.3	20.6	
	4H	18.5	19.9	18.9	20.2	20.6	18.5	19.9	18.9	20.2	20.6	
	6H	18.5	19.8	18.8	20.1	20.4	18.5	19.8	18.8	20.1	20.4	
	8H	18.4	19.7	18.8	20.0	20.3	18.4	19.7	18.8	20.0	20.3	
	12H	18.4	19.6	18.8	19.9	20.3	18.4	19.6	18.8	19.9	20.3	
4H	2H	18.4	19.8	18.8	20.1	20.4	18.4	19.8	18.8	20.1	20.4	
	3H	19.1	20.3	19.5	20.7	21.0	19.1	20.3	19.5	20.7	21.0	
	4H	19.2	20.2	19.6	20.6	21.0	19.2	20.2	19.6	20.6	21.0	
	6H	19.1	20.1	19.6	20.4	20.8	19.1	20.1	19.6	20.4	20.8	
	8H	19.1	20.0	19.5	20.4	20.8	19.1	20.0	19.5	20.4	20.8	
	12H	19.1	19.8	19.5	20.3	20.7	19.1	19.8	19.5	20.3	20.7	
8H	4H	19.1	20.0	19.6	20.4	20.8	19.1	20.0	19.6	20.4	20.8	
	6H	19.1	19.8	19.6	20.2	20.7	19.1	19.8	19.6	20.2	20.7	
	8H	19.1	19.7	19.6	20.2	20.6	19.1	19.7	19.6	20.2	20.6	
	12H	19.1	19.6	19.6	20.1	20.6	19.1	19.6	19.6	20.1	20.6	
	4H	19.1	19.9	19.6	20.3	20.7	19.1	19.9	19.6	20.3	20.7	
	6H	19.1	19.7	19.6	20.1	20.6	19.1	19.7	19.6	20.1	20.6	
12H	8H	19.1	19.6	19.6	20.1	20.6	19.1	19.6	19.6	20.1	20.6	
	12H	19.1	19.6	19.6	20.1	20.6	19.1	19.6	19.6	20.1	20.6	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.4 / -0.3					+0.4 / -0.3					
S = 1.5H		+1.4 / -1.5					+1.4 / -1.5					
S = 2.0H		+2.1 / -3.5					+2.1 / -3.5					
Standard table		BK02					BK02					
Correction Summand		1.6					1.6					
Corrected Glare Indices referring to 250lm Total Luminous Flux												

Dimensional Drawing

